

ZHENGZHOU ORIENT POWER CO., LTD

NO.9, Sanquan Road, Jinshui District, Zhengzhou, Henan, China Tel/Fax: +86 37186099969 direct: +86 13673997131

sales@composite-insulator.com http://www.compoite-insulator.com

110KV Composite cross arm Insulator

Type: 110KV composite cross arm insulator Material: Hard-wearing HTV silicone rubber

End Fittings:metallic hardware

Specific mechanical failing load: 5kN.

Application: 110KV composite cross arm insulator for the urban net rebuild can effectively solve the shortage of corridor in urban power line; reduce the pole height and economy lots of financial and material resources. Because of the high strength, to avoid the porcelain cross-arm cannot instead of it. Compared with other type composite insulators, using 110KV composite cross arm insulator can reduce financial spending and manufacturing materials

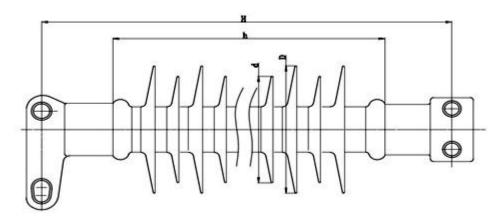


Fig. 110KV 5KN Composite Suspension Insulator

Technical data:		
Rated voltage	110	kV
Creepage distance	3150	mm
Rated cantilever load	5	kN
Arcing distance	1060	mm
Lightning impulse withstand voltage	550	kV
Power frequency wet withstand voltage	230	kV
Weight	17.8	kg
Color	Grey or red	
Standard	IEC61109	
Package	Carton	