

ZHENGZHOU ORIENT POWER CO., LTD

NO.9,Sanquan Road,Jinshui District,Zhengzhou,Henan, China Tel/Fax: +86 37186099969 direct: +86 13673997131 sales@composite-insulator.com http://www.compoite-insulator.com

15KV Composite Deadend Insulator

Type: 15KV composite deadend insulator **Material:** Hard-wearing HTV silicone rubber

End Fittings: Hot-dip galvanized forged steel materials for end fittings give good performance on erosion

Specific mechanical failing load: 70kN.

Application: 15KV composite deadend insulator made of a fiberglass-reinforced resin matrix core, polymer material weathersheds and metal end fittings intended for use on overhead lines for electric power systems, 69 kV and below. Mechanical and electrical performance levels specified are requirements for 15KV composite deadend insulators. As a composite insulator manufacturer, we manufacture high quality and reasonable price 15KV composite deadend

insulator.

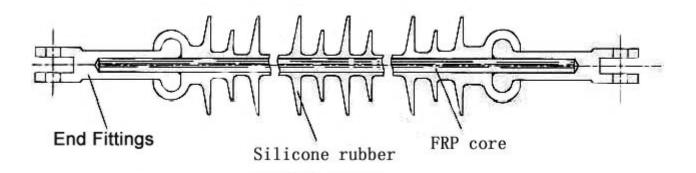


Fig. 33KV 70KN Composite Deadend Insulator

Technical data:		
Rated voltage	15	kV
Section length	322	mm
Creepage distance	384	mm
Dry arcing distance	193	mm
Specific mechanical failing load	70	kN
Power frequency dryt flashover voltage	100	kV
Power frequency wet flashover voltage	70	kV
Lightning impulse withstand voltage	230	kV
Color	Grey or red	
Package	Carton	